



**BANKS SCHOOL DISTRICT 13
TECHNOLOGY DEPARTMENT
42350 NW TRELIS WAY
BANKS, OR 97106**

**Request for Proposal:
Category 2 RFP: Fiber Cable Backbone 2025**

**Release Date: February 25, 2025
Bid Due Date: March 25, 2025**

Banks School District #13 – Banks, OR
Request for Proposal
Category TWO RFP:
Fiber Cable Backbone 2025

RFP OVERVIEW

The Banks School District (The District) is seeking pricing for the installation of a new fiber optic backbone to connect the Fiber MDF in Banks Middle School with the IDFs and/or MDFs in the Banks High School Cafeteria, the Banks High School Modular Building, and the shared High School/Middle School Wrestling Building, which currently lack fiber connectivity

LOCATIONS FOR SERVICES

Each of the described areas this Fiber Cable Backbone RFP are connected by a singular parking lot. The addresses of the two schools are:

Banks High School
13050 NW Main St
Banks, OR 97106

Banks Middle School
12850 NW Main Street
Banks, OR 97106

PLEASE SUBMIT RFP RESPONSES TO MAX SIGANDER

- **By March 25, 2025 at 11:59 PM PST**
- Submission may be made by email or paper copy
- If submitting by email, please call to verify that it is received. Banks School District cannot be responsible for an RFP sent through email without the Vendor verifying that it was sent and received. Email Submissions must have in bold letters “**Fiber Cable Backbone 2025**” in the subject line.
- Contact information:

Banks School District 13
Attn: Dr. Max Sigander
42350 NW Trellis Way
Banks, OR 97106

Phone: 503-324-8591

Email: itmgr@banks.k12.or.us

- **Proposals received after the exact time and date noted will NOT be considered.**

Banks School District #13 – Banks, OR
Request for Proposal
Category TWO RFP:
Fiber Cable Backbone 2025

RESERVATIONS AND ANNULMENTS

The Banks School District reserves the right to accept or reject any or all Proposals and to waive any and/or all technicalities in the interest of the District. The District reserves the right to increase or decrease the given quantity. In the event quantities are increased or decreased, the amount added or deducted shall be based upon unit prices quoted.

CONSIDERATION OF PROPOSALS

The Banks School District shall have the right to accept or reject any or all Proposals, or any part thereof; to waive any technicalities in the interest of the District.

PROPOSAL ERRORS

All proposals shall be deemed final, conclusive, and irrevocable, and no proposal shall be subject to correction or amended for errors or miscalculations by the proposer after proposal opening date.

VALUE ADDED SERVICES

Value added services included in the proposal will be considered for award of contract. All value-added services must be declared in detail by the Proposer, in writing, at the time of submittal of the formal proposal.

CONTRACT PERIOD

The equipment and services will be purchased only with a favorable ERATE approval of the items and services described in this RFP.

SCOPE OF WORK


A project drawing is attached, detailing specifications to assist in determining and verifying the quantities needed for a complete and properly installed system.

- Provide and install fiber optic network backbone cabling in the following quantities and areas: 12-strand single mode fiber cables from the Middle School MDF (*Marked with "1" on Map*) to each of the (3) MDF/IDFs as shown in the bid drawings. These locations are
 - Wrestling Building IDF (*Marked with green "2" on Map*)
 - Modular Building IDF (*Marked with "3" on Map*)
 - Staff Lounge MDF (*Marked with "4" on Map*)
- Provide and Install 24" H x 24" W x 30" D Wall Mount Rack Enclosure Cabinet in Wrestling Building IDF.
- Provide and Install 36" H x 24" W x 30" D Rack Enclosure Wall Mount Cabinet with rack mount in new Staff Lounge MDF.

Banks School District #13 – Banks, OR
Request for Proposal
Category TWO RFP:
Fiber Cable Backbone 2025


- Provide and install components to protect and organize cables such as Junction boxes, and conduits.
- Terminate fiber cables in rack mounted fiber distribution units or exterior enclosures as required with LC connectors in each of the listed locations.
- Test, label, and provide warranty for new fiber backbone cabling.
- Provide sufficient patch cords for patching in one half of the installed fiber strands.

We look forward to reviewing your bids.

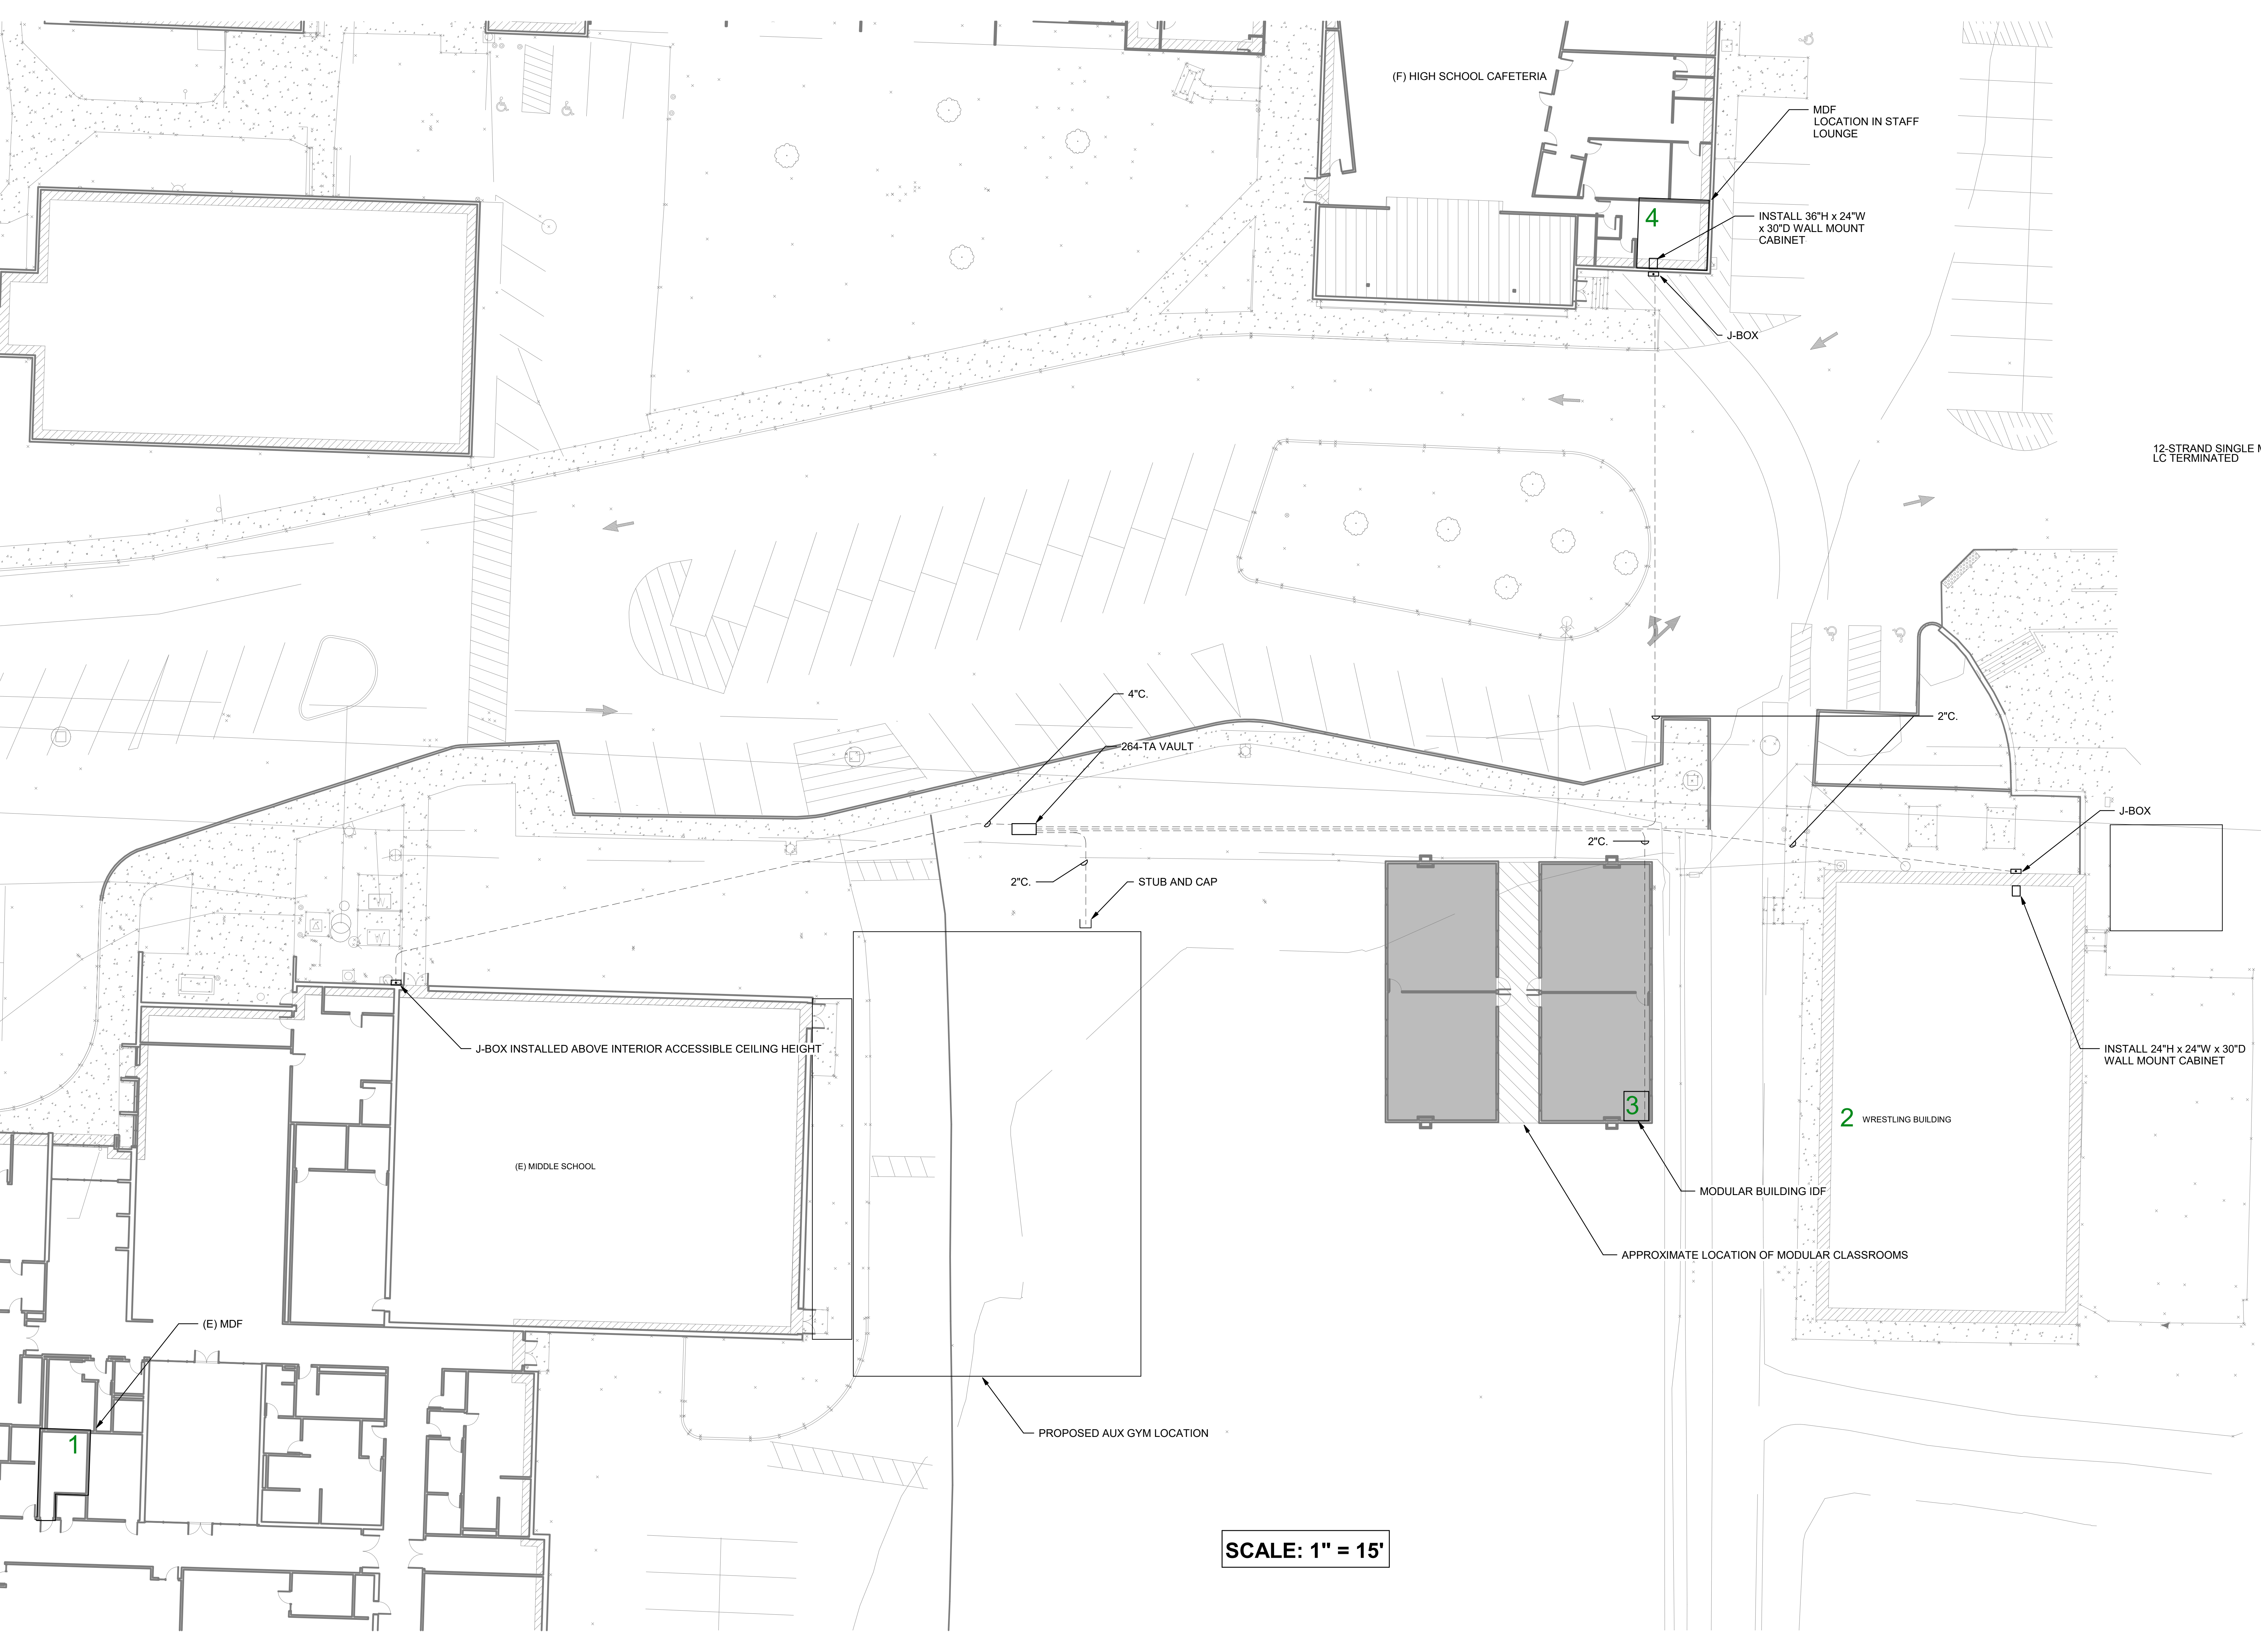

GENERAL NOTES:

- A. THIS IS A BIDDER DESIGNED PROJECT. DRAWINGS ARE A GUIDE TO ASSIST IN INTENT AND SCALED MEASUREMENTS.
- B. COORDINATE EXACT IDF CABINET LOCATIONS WITH THE DISTRICT.
- C. COORDINATE ALL UNDERGROUND CONDUIT ROUTING WITH THE DISTRICT AND ONSITE CMGC.
- D. COORDINATE J-BOX INSTALLATION AND ROUTING THROUGH EXISTING BUILDINGS WITH SITE/BUILDING CONDITIONS.
- E. MIDDLE SCHOOL
- F. HIGH SCHOOL CAFETERIA

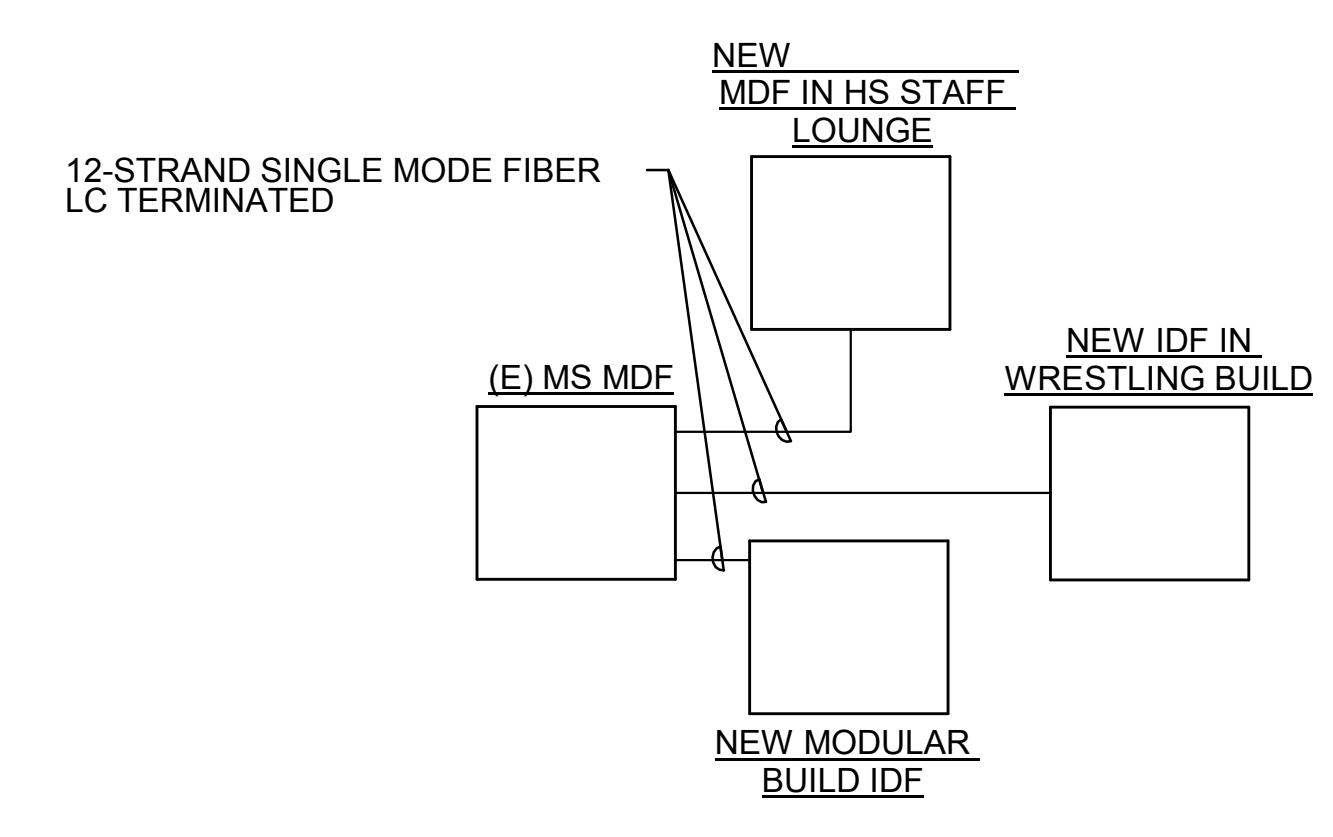

BACKBONE RISER

SCALE: 1" = 15'